

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification<sup>7</sup> :

B60R 25/10

A1

(11) International Publication Number:

WO 00/58136

(43) International Publication Date:

5 October 2000 (05.10.00)

(21) International Application Number: PCT/US00/07964

(22) International Filing Date: 24 March 2000 (24.03.00)

(30) Priority Data:

60/126,331

26 March 1999 (26.03.99)

US

(71)(72) Applicants and Inventors: MILLER, Richard, L., Jr. [US/US]; 4885 Highway 150, Palmyra, IN 47164 (US). MILLER, Teresa, F. [US/US]; 4885 Highway 150, Palmyra, IN 47164 (US). MILLER, J., Darren [US/US]; 3055 Sable Creek Court, Greenwood, IN 46142 (US). WHITEHEAD, James [US/US]; 437 Randolph Avenue, Clarksville, IN 47129 (US). GRUBE, Larry [US/US]; 800 West 6th Street, New Albany, IN 47150 (US). SEDLASEK, Frank [US/US]; 116 North Lively Boulevard, Elk Grove Village, IL 60007 (US). MUTH, Peter [-/US]; 556 East Shagbark Lane No. D, Streamwood, IL 60107 (US).


(74) Agents: TALTAUVULL, W., Warren et al.; Farkas & Manelli PLLC, Suite 700, 2000 M Street N.W., Washington, DC 20036 (US).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

## Published

*With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: VEHICLE ALARM REMOTE PAGING SYSTEM

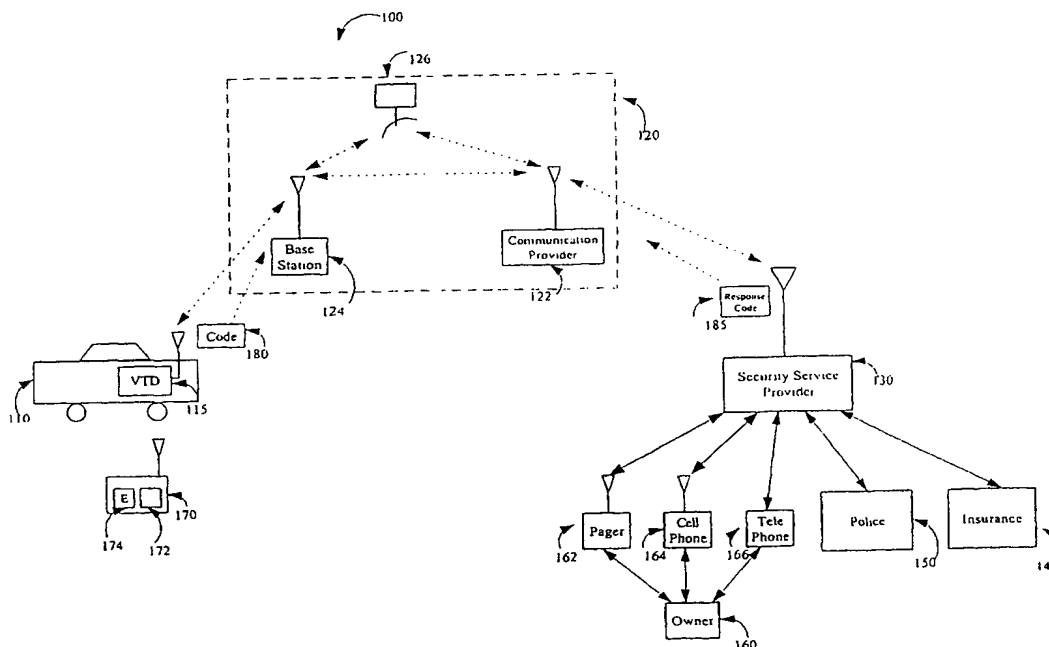

## (57) Abstract

The present invention relates to the use of a commercial two-way communication module (115) for preventing automobile theft. In particular, the commercial two-way communication module, e.g., digital pager module (162) or cellular telephone module (164), is used in a theft deterrent system. The theft deterrent unit also includes a location positioning system module, and accelerometer module, a vehicle interface, and a controller.

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

# VEHICLE ALARM REMOTE PAGING SYSTEM

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

5           This invention relates generally to remote control of a vehicle alarm system through a commercial two-way radio-frequency (RF) digital data carrier.

### 2. Background of Related Art

10           The typical vehicle, e.g., an automobile, has increased in cost consistently over the past several years. Consumer forecasters see this trend continuing into the near future.

15           As the costs of vehicles have increased, the desirability of vehicles to car thieves has also correspondingly increased. In response to increased car thefts, prior art vehicle security systems have relied on various techniques to deter car thieves. For example, a common technique of theft deterrence is to use a steering wheel lock. The steering wheel lock is a device that prevents the steering wheel from being turned in either direction. However, car thieves have easily defeated the steering wheel locks by cutting through the steering wheels.

20           Other, more sophisticated, techniques involve using car alarm systems or position locating systems within the vehicles. The typical car alarm system operates with a remote electronic key which activates and deactivates the car alarm system. Once armed, the car alarm system may trigger a loud siren or a flashing of lights of the vehicle based on vibration or noise associated with an authorized user breaking into the vehicle. The car alarm system relies  
25           on a dutiful bystander to inform law enforcement authorities of an ongoing theft or the vehicle owner investigating the alarm.

30           However, the typical reaction of bystanders to car alarm sirens is to ignore the car alarms since car alarms often trigger because of the sensitivities of sensors in the car alarm system. Furthermore, experienced thieves may be able to defeat the car alarm systems prior to or just after breaking into the vehicle.

Position locating systems involve placing a device on the vehicle that either broadcasts a homing signal or position data of the vehicle. When a vehicle is stolen, the position locating system is activated. The position locating system broadcasts a homing signal or position data of the vehicle in conjunction with satellites to law enforcement authorities. The position locating systems are effective, but the authorities have to be equipped with the proper equipment to be able to detect the homing signal or to receive the position data. In an era of reduced government budgets, law enforcement authorities may not be able to afford to purchase the appropriate equipment for vehicle recovery, let alone the equipment for multiple competing security systems.

Another factor that may contribute to the higher costs of position locating system is development costs. Manufacturers of position locating systems typically developed their respective systems using proprietary equipment. The manufacturers will typically develop their systems from scratch which incur the costs of research and testing which contribute to the overall cost of the position locating systems.

### SUMMARY OF THE INVENTION

There is a need for an anti-theft vehicle system that provides for two-way communication between the vehicle and a security provider using standard communication equipment. The purposes of the invention are:

One aspect of the invention is to provide an anti-theft vehicle system that provides the owner of a vehicle the capability to disable a vehicle to prevent theft.

Another aspect of the present invention is to provide an anti-theft vehicle system that provides a wide geographic area of coverage using an existing communication infrastructure.

Yet another aspect of the present invention is to provide an anti-theft vehicle system that provides law enforcement authorities the capability to disable a vehicle without endangering the public.

Yet another aspect of the present invention is to provide an anti-theft vehicle system that provides theft deterrence at a relatively low cost.

Yet another aspect of the present invention is to provide an anti-theft vehicle system that provides location information to one or both the owner  
5 of the vehicle or law enforcement authorities over an existing communication infrastructure.

These and other needs are attained by the present invention, where a vehicle theft deterrent system adapted for cooperation with a security service provider, comprising a vehicle theft deterrent device. The vehicle theft  
10 deterrent device includes a vehicle interface module, a two-way communication module, and a controller which is configured to generate a signal in the two-way communication module to the security service provider in response to the vehicle interface module detecting a condition in the vehicle such as a dome light current and an ignition activation. The use of a two-way communication module  
15 provides the capability of users to communicate with the vehicle using existing communication infrastructure. The system thereby provides a greater coverage area for the theft deterrent system.

Another aspect of the present invention provides for a method of deterring vehicular theft comprising detecting either a dome light current or an  
20 ignition activation in a vehicle through a vehicle interface module of a vehicular theft deterrent device. A two-way communication module sends a signal from the vehicular theft deterrent device to a security service provider in response to the detecting, and contacting an owner of the vehicle from the security service provider of the detection. Accordingly, the use of a single security service  
25 provider provides access to law enforcement authorities without incurring any extra equipment expenses.

### BRIEF DESCRIPTION OF THE DRAWINGS

Features and advantages of the present invention will become  
30 apparent to those skilled in the art from the following description with reference to the drawings, in which:

Fig. 1 shows a block diagram of a theft deterrent system including a commercial two-way communication network, and a security service provider.

Fig. 2 shows another embodiment of the theft deterrent system.

Fig. 3 shows a more detailed block diagram of the theft deterrent unit shown in Fig. 1.

Fig. 4 shows a block diagram of the vehicle theft deterrent unit 115 interfaced with the various systems of the vehicle 110 shown in Fig. 1.

Fig. 5 shows a flow diagram of the functions implemented by the controller 340 of the vehicle theft deterrent unit.

Fig. 6 illustrates a flow diagram of the local alarm module implemented by the controller shown in Fig. 3.

Fig. 7 illustrates a flow diagram of the remote door module implemented by the controller shown in Fig. 3.

Fig. 8 shows a preliminary bit mode table for the controller shown in Fig. 4.

## DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

The present invention relates to the use of a commercial two-way communication module for preventing automobile theft. In particular, the commercial two-way communication module, e.g., digital pager module or cellular telephone module, is used in a theft deterrent system. The vehicle theft deterrent unit or device also includes a location positioning system module, an accelerometer module, a vehicle interface, and a controller. The vehicle theft deterrent unit may be operated via two methods: a keyless remote control or by contacting a security service provider via telephone, facsimile, or means of telecommunication equipment.

Fig. 1 illustrates an embodiment of the theft deterrent system 100 including a two-way commercial communication system.

As shown in Fig. 1, the theft deterrent system 100 includes a vehicle 110 with an installed vehicle theft deterrent unit 115, a commercial wireless two-way communication system 120, and a security service provider

130. The vehicle 110 is not limited to automobiles and trucks, but the principles of the present invention apply to all types of vehicles such as boats, motorcycles, planes, and trailers.

The commercial wireless two-way communication system 120 includes a wireless communication provider 122, a plurality of base stations 124, and a plurality of satellites 126. The commercial wireless two-way communication system may be a digital pager network, a digital cellular telephone network, or any type of nationwide wireless two-way communication system.

The plurality of base stations 124 are installed over a wide geographic area in such a manner that communications with a commercial two-way communication unit may be enabled in the wide geographic area. The plurality of base stations 124 are in communication with the communication provider 122 directly or in combination with the plurality of satellites 126.

The wireless communication provider 122 provides an interface with the wireless communication system with existing landline communication system such as the plain old telephone system (POTS) or the Internet. Through this interface, users of the commercial wireless two-way communication system may establish communication with other landline users or devices.

The security service provider 130 provides a security service to the users of the vehicle theft deterrent system 100. After a vehicle theft deterrent unit 115 is installed in a vehicle 110, the owner of the vehicle 160 provides license plate information, vehicle identification number and a serial number of the vehicle theft deterrent unit to the security service provider 130 over POTS or the Internet. The security service provider 130 maintains a secured database of the vehicle theft deterrent unit 115 and an associated security code. If the vehicle 110 is stolen, the owner of the vehicle 160 contacts law enforcement authorities and provides a license plate number of the vehicle 110. Law enforcement authorities contact the security service provider 130 to access the secured database to obtain a contact number for the vehicle theft deterrent unit and the associated security code by cross-referencing the provided license plate number.

The law enforcement authorities 150 may then dial the contact number and associated security code. Upon receiving the associated security code, the vehicle theft deterrent unit 115 will begin deactivation of the vehicle 110.

Another aspect of the present invention is that the vehicle theft deterrent unit 115 will notify one or both of the owner of the vehicle 115 and law enforcement authorities in the event of a vehicle theft or vehicle break-in.

After activation of an installed vehicle theft deterrent unit 115, the vehicle theft deterrent unit 115 is set in an alarm mode. If the vehicle theft deterrent unit 115 detects either one of a dome light current or ignition activation; the vehicle theft deterrent unit 115 transmits a code 180 to the security service provider 130 over the commercial wireless two-way communication system 120. The vehicle theft deterrent unit 115 also simultaneously disables the vehicle preventing the vehicle from moving. In the event that an authorized user has started the vehicle 110 moving, the vehicle theft deterrent unit 115 may still disable the vehicle 110 according to the following.

The received code 180 is interpreted by the security service provider 130 as a vehicle theft or break-in. Subsequently, the security service provider 130 informs law enforcement authorities, e.g., the police 150, as well as the owner of the vehicle 160. The security service provider 130 may inform the owner 160 using a variety of contact methods such as pager 162, a cellular telephone 164, telephone 166, or whatever type of communication method the owner 160 specifies. The security service provider may also inform the vehicle owner's insurer to begin processing of a claim for the vehicle 110.

The security service provider 130 may send a response code 185 over the commercial two-way communication system 120 to the received code that informs the vehicle theft unit 115 to begin initiation of a deactivation sequence of the vehicle 110 which disables the vehicle 110 when the speed of the vehicle decreases past a pre-determined speed, e.g., five miles per hour with an error margin of two mph.



Yet another aspect of the present invention is the capability of the vehicle theft deterrent unit 115 to be activated by either a keyless remote control 170 or the security service provider 130.

5 The keyless remote control 170 is a radio frequency device that allows the owner to control the functionality of the vehicle theft deterrent unit 115. The keyless remote control includes a keypad 172 to control the functions of the vehicle theft deterrent unit 115. The keyless remote control may also contains an emergency button 174. When the emergency button 174 is activated, vehicle theft deterrent device 115 sends an emergency code which  
10 represents an emergency event. The emergency event may be a medical emergency, an accident or a car-jacking. Upon receiving the emergency code, the security service provider 130 will locate the vehicle and send either law enforcement authorities and/or emergency medical personnel.

The vehicle theft deterrent unit 115 may also be controlled remotely  
15 by contacting the security service provider 130 via a telephone, pager, or other type of telecommunication device. Once the owner of the vehicle has been identified, the security service provider 130 may activate or deactivate the functions of the vehicle theft deterrent unit 115. Thus, providing an extra measure of security in the event that the keyless remote control 170 is ever lost.

20 Fig. 2 shows another embodiment of the vehicle theft system 200. As shown in Fig. 2, the vehicle theft system 200 includes a security service provider 210 interfaced to the Internet 220, a police interface 230, and an insurance interface 240. Once informed by the vehicle theft deterrent unit 115 that a theft or break-in has occurred by an authorized user, the security service  
25 provider 210 may automatically inform the police via the police through the police interface 230. The police interface 230 may include the Internet, a facsimile, and electronic mail. The security service provider 210 may also automatically inform the insurer of the owner 160 through the insurance interface 240. The insurance interface may include the Internet, facsimile, or electronic mail. The  
30 security service provider 210 may provide a license plate number, vehicle

identification number, and etc. to the police and the insurance company of the owner.

The Internet interface 220 provides a multi-functional interface to the security service provider 210. Law enforcement authorities, e.g. the police 250 may access the secured database of the security service provider 210 via a secured security service provider website 255. In this manner, the police 250 may quickly obtain the associated security code of a stolen vehicle 110 equipped with the vehicle theft deterrent unit 115 to begin deactivation and recovery of the stolen vehicle 110.

The Internet interface 220 also provides a way for the customer and security service provider 210 to communicate in the event of a stolen vehicle, or the customer 260 and the security service provider 210 may directly communicate over telephone 262.

Fig. 3 illustrates a block diagram of a vehicle theft deterrent unit 300 in the vehicle theft deterrent system illustrated in Fig. 1. The theft deterrent unit 300 also includes a location positioning system module 310, an accelerometer module 320, a vehicle interface 330, a controller 340, and a commercial two-way communication module 350. The aforementioned modules may be constructed with commercially available equipment.

The vehicle theft deterrent unit 300 is interfaced with a vehicle's electrical system through the vehicle interface 330. The vehicle interface 330 provides a communication path to vehicle systems such as door lock control, ignition systems, horn system, headlight and parking lights system, and etc. The vehicle interface 330 may be expanded to include factory or after-market alarm systems.

The vehicle interface 330 is in communication with the controller 340. The controller 340 implements the functionality of the vehicle theft deterrent unit 300 that include, but not limited to, local and remote alarm capability, remote door lock control, ignition disable and enable, horn activation, parking lights activation, factory alarm detection, speed detection, radio frequency transmit and receive, account status, alarm mode status, ignition

status, and etc. The controller may be implemented by using a microprocessor, digital signal processor, or microcontroller.

The controller 340 is also interfaced with an accelerometer module 320. The accelerometer module 320 provides velocity or speed information to the controller. An example of an accelerometer module that may be used in the vehicle theft deterrent unit 115 may be the Analog Device ADXL202JQC.

The location positioning module 310 provides location and position data such as latitude and longitude information to the controller 340. An example of a location positioning module 310 that may be used in the vehicle theft deterrent unit 115 may be PLCC-84-42.

The controller 340 is interfaced with a commercial two-way communication module 350. The commercial two-way communication module 350 may be a digital pager module, or a cellular telephone module. The commercial two-way communication module 350 provides a duplex communication path for the theft deterrent unit to communicate with vehicle owners and/or law enforcement authorities.

Fig. 4 illustrates a block diagram of the vehicle theft deterrent unit 300 illustrated in Fig. 3 interfaced with various systems of the vehicle 110 illustrated in Fig. 1.

The vehicle 110 includes a headlight system 400, a parking lights system 410, a local/remote alarm system 420, an optional factory alarm system 430, a horn system 440, a speed detection system 450, a dome light detection 460, an ignition system 470, a door lock system 480, a fuel system, and an airbag system 495. As discussed above, the various systems are interfaced with the vehicle theft deterrent unit 115 via the vehicle interface 330.

The controller 340 also includes an additional multipurpose interface 342 and two serial outputs 344, 346. Serial outputs 344, 346 may be used to output video data or to output remote display data from the controller 340.

Fig. 5 illustrates a flow diagram 500 of the overall functionality implemented by the controller 340 of the vehicle theft deterrent unit 115 illustrated in Fig. 1.

As shown in Fig. 5, the controller 340 implements in software a local alarm module 502, a remote alarm module 504, a remote door lock module 506, an ignition control module 508, a horn activation module 510, a head light/parking light activation module 512, 514, a factory alarm module 516, a speed detection module 518, a radio frequency (RF) transmit and receive module 520, a status module, 522 and a location module 524.

The local alarm module 502 implemented by the controller 340 is illustrated in a more detailed flow diagram in Fig. 6.

In step 610, the controller 340 detects a dome light current from the dome light system 460 or ignition from the ignition system 470 of the vehicle 110.

The controller 340 interprets these events as a theft/break-in, in step 620.

The controller 340 in response to step 620 transmits a code to the security service provider 130, in step 630 and begins waiting for a response code from the security service provider in step 640.

Upon receiving the response code from the security service provider 130, the controller 340 activates the deactivation sequence for the vehicle 110 in step 650. The deactivation sequence may include disabling the vehicle 110 when the speed of the vehicle 110 drops below a predetermined speed, e.g., five (5) miles per hour with an error margin of plus or minus 2 mph, flashing lights and the horn.

In step 660, the controller 340 periodically polls the accelerometer module 320 for the speed of the vehicle 110. Subsequently, the speed information is transmitted back to the security service provider 130.

Once the deactivation sequence has begun, the controller 340 monitors the speed of the vehicle in step 670. If the speed of the vehicle 110 drops below 2 mph, the controller 340 signals the ignition system 470 to turn the ignition off.

In step 690, the controller 340 signals the headlights system 400 and the parking light system 410 to begin flashing. The controller 340 also signals the horn system 440 to begin beeping. With the lights flashing and the horn beeping, bystanders will know that the vehicle 110 is in some sort of  
5 distress.

Returning to Fig. 5, the remote alarm module 504 implemented by the controller 340 provides for the vehicle owner and/or law enforcement may remotely deactivate the vehicle ignition and activate the alarm functions. However, the ignition will not be disabled unless the speed is detected at less  
10 than 2 mph. Additionally, the remote alarm function may include door unlock, alarm off, a horn sound, and a light flash for vehicle location. The remote alarm function may also include a long term ignition disable.

The remote door lock module 506 implemented by the controller 340 provides for two options of opening the doors of the vehicles. The owner of  
15 the vehicle may have a keyless remote control which is a radio frequency device that allows the owner to unlock/lock the vehicle and deactivate/activate the alarm functions. The owner of the vehicle also has the option to open the doors through the security service provider 130.

Fig. 7 illustrates a more detailed flow diagram 700 of the remote  
20 door lock module 506 implemented by the controller 340.

In the event that the owner does not have the keyless remote control and wants entry into the vehicle, the owner may open the door and disable the alarm if set by contacting the security service provider 130 in step  
25 710. The owner may contact the security service provider 130 using a telephone, a pager or the Internet illustrated in Fig. 2.

In step 720, the security service provider 130 signals the vehicle theft deterrent unit 115 over the commercial two-way system 120.

Upon receiving the signal, the controller 340 deactivates the alarm if the alarm was set or activates the alarm if the alarm was not set, in step 740,  
30 and unlocks the doors by signaling the door lock system 480 to open or locks the door if the alarm was not armed in the previous step, in step 750.

The controller 340 also enables the fuel system 490 or the ignition system 470 if the systems were disabled.

Returning to Fig. 5, the ignition control module 508 implemented by the controller 340 provides for the controller 340 to enable or disable the ignition system 470 of the vehicle 110. The ignition system 470 is disabled through the use of a transistor that is biased normally closed. The controller 340 and a latching relay control the function of the transistor.

The ignition control module 508 also provides for disabling the ignition system 470 by contacting the security service provider 130 and requesting the security service provider 130 to disable the ignition system 470 as well as locally by a keyless remote control.

The horn activation module 510 provides for the controller 340 the capability to activate the horn. The horn is activated to indicate that the alarm is activated by the keyless remote control 170 or by the security service provider 130. In this case, the horn sounds for approximately 0.25 seconds.

The horn activation module 510 also provides for sounding the horn for up to five minutes in the event that the local alarm system 502 has been activated and the ignition system 420 has been disabled.

The horn activation module 510 may also provide for a vehicle location function. In the event that an owner of the vehicle 110 were to forget where the vehicle was parked. The owner of the vehicle would then call the security service provider 130 to initiate a car finder function. The security service provider 130 would send a signal to the vehicle theft deterrent unit 115 to activate the horn. The controller 340 would receive the signal and activate the horn system 440 for five minutes to allow the owner of the vehicle to locate the vehicle.

The head light activation module 512 provides for the controller 340 the capability to activate the headlights of the headlight system 400. The headlights are activated to indicate that the alarm is activated by a keyless remote control. In this case, the headlight lights for approximately 0.25 seconds.

The head light activation module 512 provides for activating the headlights for up to five minutes in the event that the local alarm system 502 has been activated and the ignition system 420 has been disabled.

5 The head light activation module 512 may also provide for a vehicle location function. In the event that an owner of the vehicle 110 were to forget where the vehicle was parked. The owner of the vehicle would then call the security service provider 130 to initiate a car finder function. The security service provider 130 would send a signal to the vehicle theft deterrent unit 115 to activate the headlights. The controller 340 would receive the signal and activate  
10 the headlight system 400 for five minutes to allow the owner of the vehicle to locate the vehicle.

The parking light activation module 514 provides for the controller 340 the capability to activate the lights of the parking light system 410. The parking lights are activated to indicate that the alarm is activated by a keyless  
15 remote control. In this case, the parking lights for flashed approximately 0.25 seconds.

The parking light activation module 514 provides for activating the parking lights for up to five minutes in the event that the local alarm system 502 has been activated and the ignition system 420 has been disabled.

20 The parking light activation module 514 may also provide for a vehicle location function. In the even that an owner of the vehicle 110 were to forget where the vehicle was parked. The owner of the vehicle would then call the security service provider 130 to initiate a car finder function. The security service provider 130 would send a signal to the vehicle theft deterrent unit 115 to  
25 activate the headlights. The controller 340 would receive the signal and activate the parking light system 410 for five minutes to allow the owner of the vehicle to locate the vehicle.

The factory alarm module 516 provides for the controller 340 the capability to detect an installed factory alarm system. In this event, a keyless  
30 remote control of the factory alarm system could control the vehicle theft deterrent unit 115. In this manner, the vehicle theft deterrent system 100 lowers

the cost to the owner since the owner does not have to replace his current alarm system.

5 The speed detection module 518 provides for the controller 340 the capability to detect the speed of the vehicle. The speed detection module 518 monitors data signals from the accelerometer module 320. The speed detection is used by the vehicle theft unit for two basic system functions: one, transmitting through the two-way communication module 350 the speed of the vehicle and to ensure that the ignition system 470 is not deactivated while the vehicle is moving at a high rate of speed. However, law enforcement authorities may deactivate  
10 the ignition system 470 at any time or any speed so long as it is deemed safe.

The RF transmit and receive module 520 provides the necessary control signals for the controller 340 to control the two-way communication module 350 for the vehicle theft deterrent unit 115 to communicate with the security service provider 115.

15 The status module 520 provides the controller 340 the status of the vehicle theft deterrent unit 115. The status module 520 polls a set of latching relays on a parallel port of the controller 340. The latches store the last status and transistors to control any external functions.

The status bits are shown illustrated in Fig. 8.

20 The location module 522 provides the controller 340 the position and location data from the location positioning module 310. The controller 340 signals the GPS module 310 for data, and the location positioning module 310 returns position and location information which includes latitude and longitude information.

25 The accident module 526 provides the controller 340 information of whether the vehicle has been involved in an accident. The accident module 526 monitors whether the airbags have been deployed from the airbag sensor system 495. If the airbags have been deployed, the controller 340 signals the two-way communication module 350 to generate an accident code which would  
30 include location information to the security service provider 130. The security



service provider 130 would then inform law enforcement authorities and/or medical personnel to provide aid to the owner of the vehicle.

5 The emergency module 528 provides the controller information of whether the owner or the customer of the security service needs emergency service. In the event of an emergency event, the owner would press the emergency button 174 on the keyless remote 170. The keyless remote sends a signal to the vehicle theft deterrent unit 115. Upon receiving the signal, the controller 340 signals the two-way communication module 350 to send an emergency code which includes location information from the location positioning  
10 module 310 to the security service provider 130. The security service provider 130 would then inform law enforcement authorities and/or medical personnel to provide aid to the owner.

The controller 340 may also implement some optional feature module 530. The optional features may include a remote start, a remote window  
15 control, or a remote shock sensor.

While the invention has been described with reference to the exemplary embodiments thereof, those skilled in the art will be able to make various modifications to the described embodiments of the invention without departing from the true spirit and scope of the invention.

16  
CLAIMS

What is claimed is:

1. A vehicle theft deterrent system adapted for cooperation  
5 with a security service provider, comprising:  
a vehicle theft deterrent device comprising:  
a vehicle interface module;  
a two-way communication module; and  
a controller configured to generate a signal in said  
10 two-way communication module to said security service provider in  
response to said vehicle interface module detecting one of a dome light  
current and an ignition activation.
2. The vehicle theft deterrent system according to claim 1,  
15 wherein:  
said controller is further configured to disable a vehicle in  
response to said vehicle interface module detecting one of a dome light  
current or an ignition activation of said vehicle.
3. The vehicle theft deterrent system according to claim 1,  
20 further comprising:  
an accelerometer module configured to provide a vehicular  
velocity information wherein said controller is further configured to  
generate subsequent periodic messages in said two-way communication  
25 module that include said vehicular velocity information to said security  
service provider.
4. The vehicle theft deterrent system according to claim 1,  
further comprising:  
30 a location positioning system module to provide location  
information including longitude and latitude data.

5. The vehicle theft deterrent system according to claim 1, further comprising:

5 a pager configured to receive a notification message from said security service provider subsequent to said central operation receiving said message.

6. The vehicle theft deterrent system according to claim 3, wherein:

10 said controller is further configured to deactivate an ignition of said vehicle in response to said accelerometer module detecting said vehicular velocity information is less than two miles per hour.

7. The vehicle theft deterrent system according to claim 6, wherein:

15 said vehicular information includes an error margin of two miles per hour.

8. The vehicle theft deterrent system according to claim 3, wherein:

20 said controller is further configured to initiate a flashing of lights of said vehicle in response to said accelerometer module detecting said vehicle velocity information is less than two miles per hour.

9. The vehicle theft deterrent system according to claim 8, wherein:

25 said vehicular information includes an error margin of two miles per hour.

10. The vehicle theft deterrent system according to claim 1, further comprising:

5 a pager is configured to send a deactivation message to said vehicle theft deterrent device through said two-way communication interface module to initiate an ignition deactivation.

11. The vehicle theft deterrent system according to claim 7, wherein:

10 said controller is configured to deactivate an ignition of said vehicle in response to said accelerometer module detecting a vehicle velocity information is less than two miles per hour.

12. The vehicle theft deterrent system according to claim 12, wherein:

15 said vehicular information includes an error margin of two miles per hour.

13. The vehicle theft deterrent system according to claim 1, further comprising:

20 a pager is configured to send an alarm activate message to said vehicle theft deterrent device to initiate an alarm function.

14. The vehicle theft deterrent system according to claim 1, wherein:

25 said two-way communication module includes a digital pager module.

15. The vehicle theft deterrent system according to claim 1, wherein:

30 said two-way communication module includes a digital cellular module.

16. The vehicle theft deterrent system according to claim 1, further comprising:

5 a keyless remote control including an emergency button wherein a keypress of said emergency button generates an emergency signal to send aid from said vehicle theft deterrent device to said security service provider.

10 17. The vehicle theft deterrent system according to claim 1, wherein:

said controller is further configured to generate another signal in said two-way communication module to said security service provide in response to a detection of an airbag deployment.

15 18. A method of deterring vehicular theft, comprising:

detecting one of a dome light current and an ignition activation in a vehicle through a vehicle interface module of a vehicular theft deterrent device;

20 sending a signal from a two-way communication module of said vehicular theft deterrent device to a security service provider in response to said detecting; and

contacting an owner of said vehicle from said security service provider of said detecting.

25 19. The method of deterring vehicular theft according to claim 18, further comprising:

periodically sending an update signal to said security service provider that includes a vehicular velocity information of said vehicle from an accelerometer module.

30

20. The method of deterring vehicular theft according to claim 17, further comprising:

activating an ignition deactivation sequence including lights and a horn of said vehicle.

5

21. The method of deterring vehicular theft according to claim 19, further comprising:

wherein said ignition deactivation sequence deactivates an ignition of said vehicle in response to said accelerometer module sensing said vehicular velocity information is less than two miles per hour.

10

22. The method of deterring vehicular theft according to claim 18, further comprising:

sending a deactivation signal from a remote location to said vehicle to initiate ignition deactivation sequence.

15

23. The method of deterring vehicular theft according to claim 21, wherein:

said ignition deactivation sequence deactivates an ignition of said vehicle in response to an accelerometer module sensing a vehicular velocity information is less than two miles per hour.

20

24. The method of deterring vehicular theft according to claim 18, further comprising:

sending an activation signal from a remote location to said vehicle to activate an alarm function.

25

25. The method of deterring vehicular theft according to claim 18, further comprising:

disabling said vehicle in response to said detecting of one of said dome light current and said ignition activation.

30

26. The method of deterring vehicle theft according to claim<sup>21</sup>  
21, wherein:

said vehicular information includes an error margin of two  
miles per hour.

5

27. The method of deterring vehicle theft according to claim  
23, wherein:

said vehicular information includes an error margin of two  
miles per hour.

10

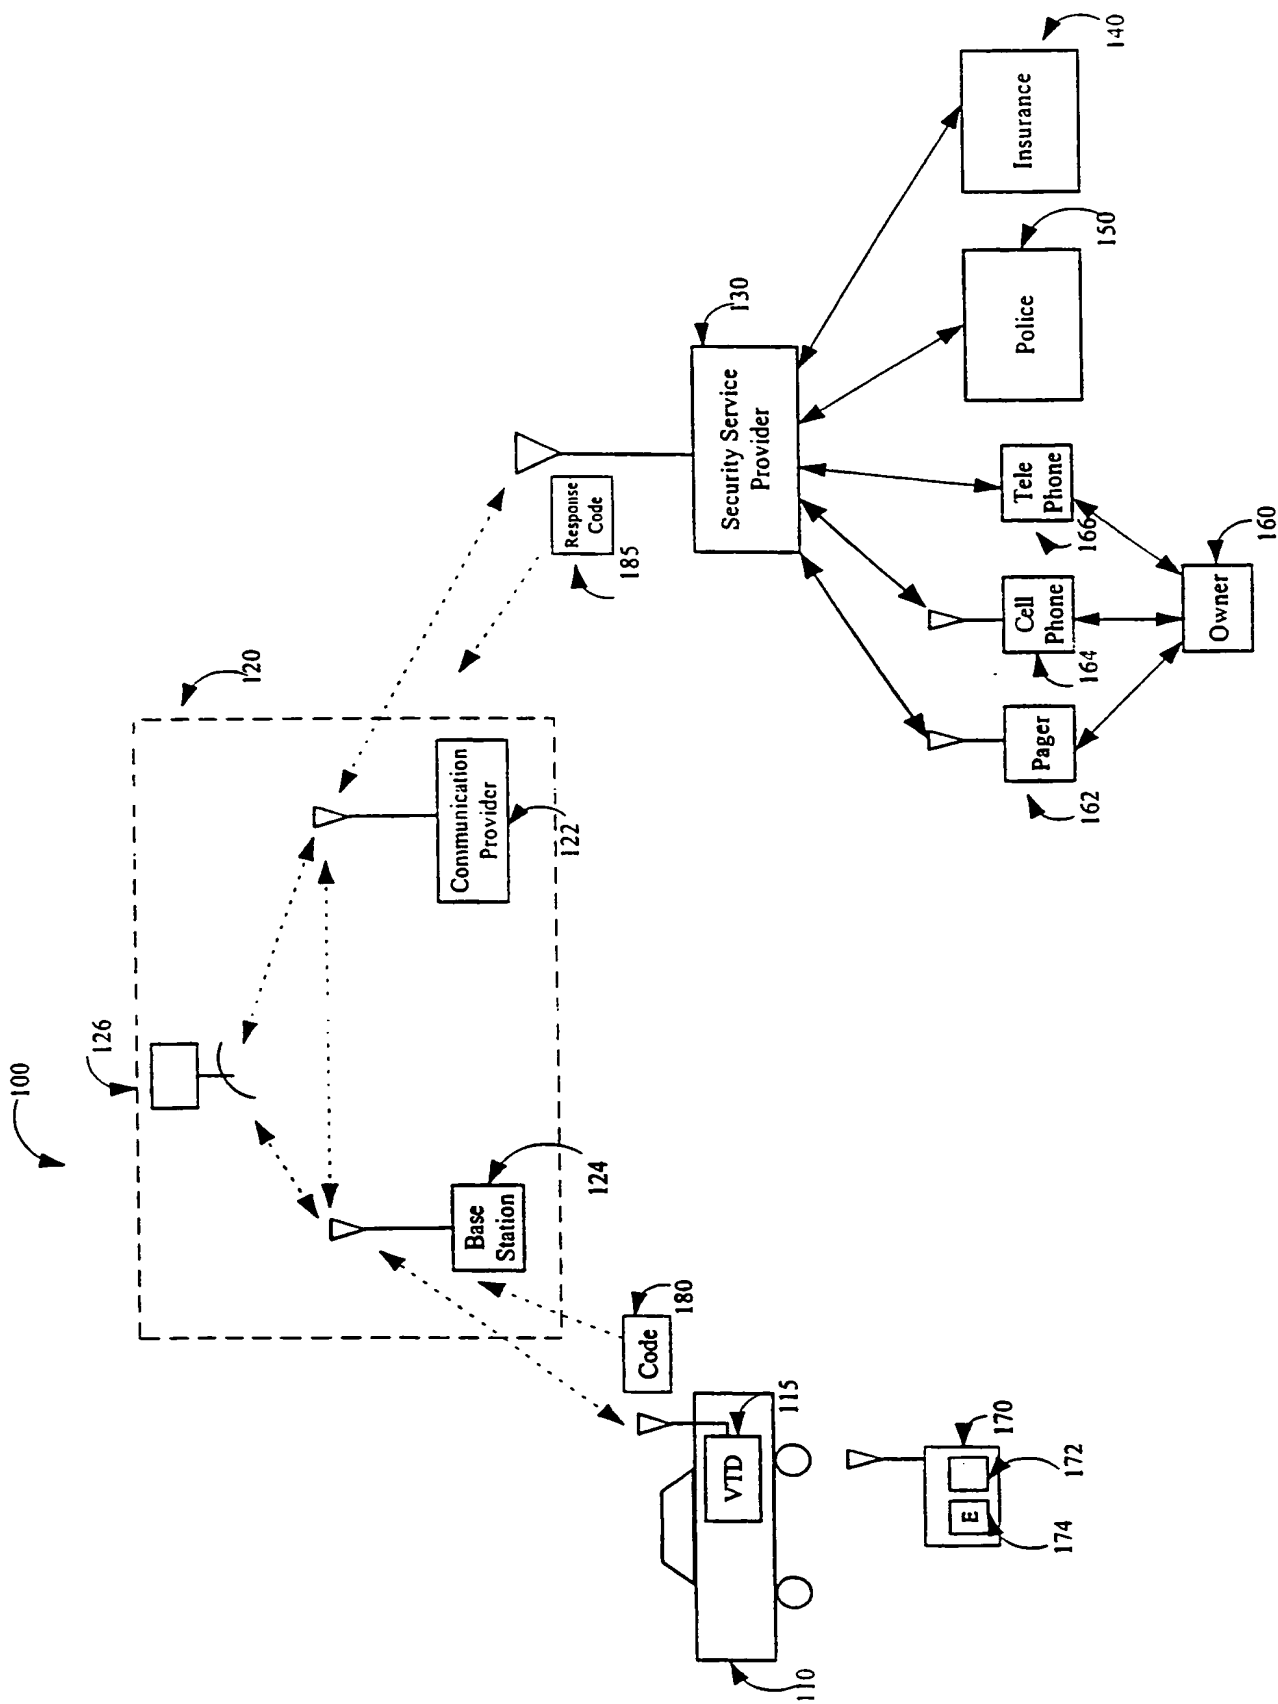


Figure 1



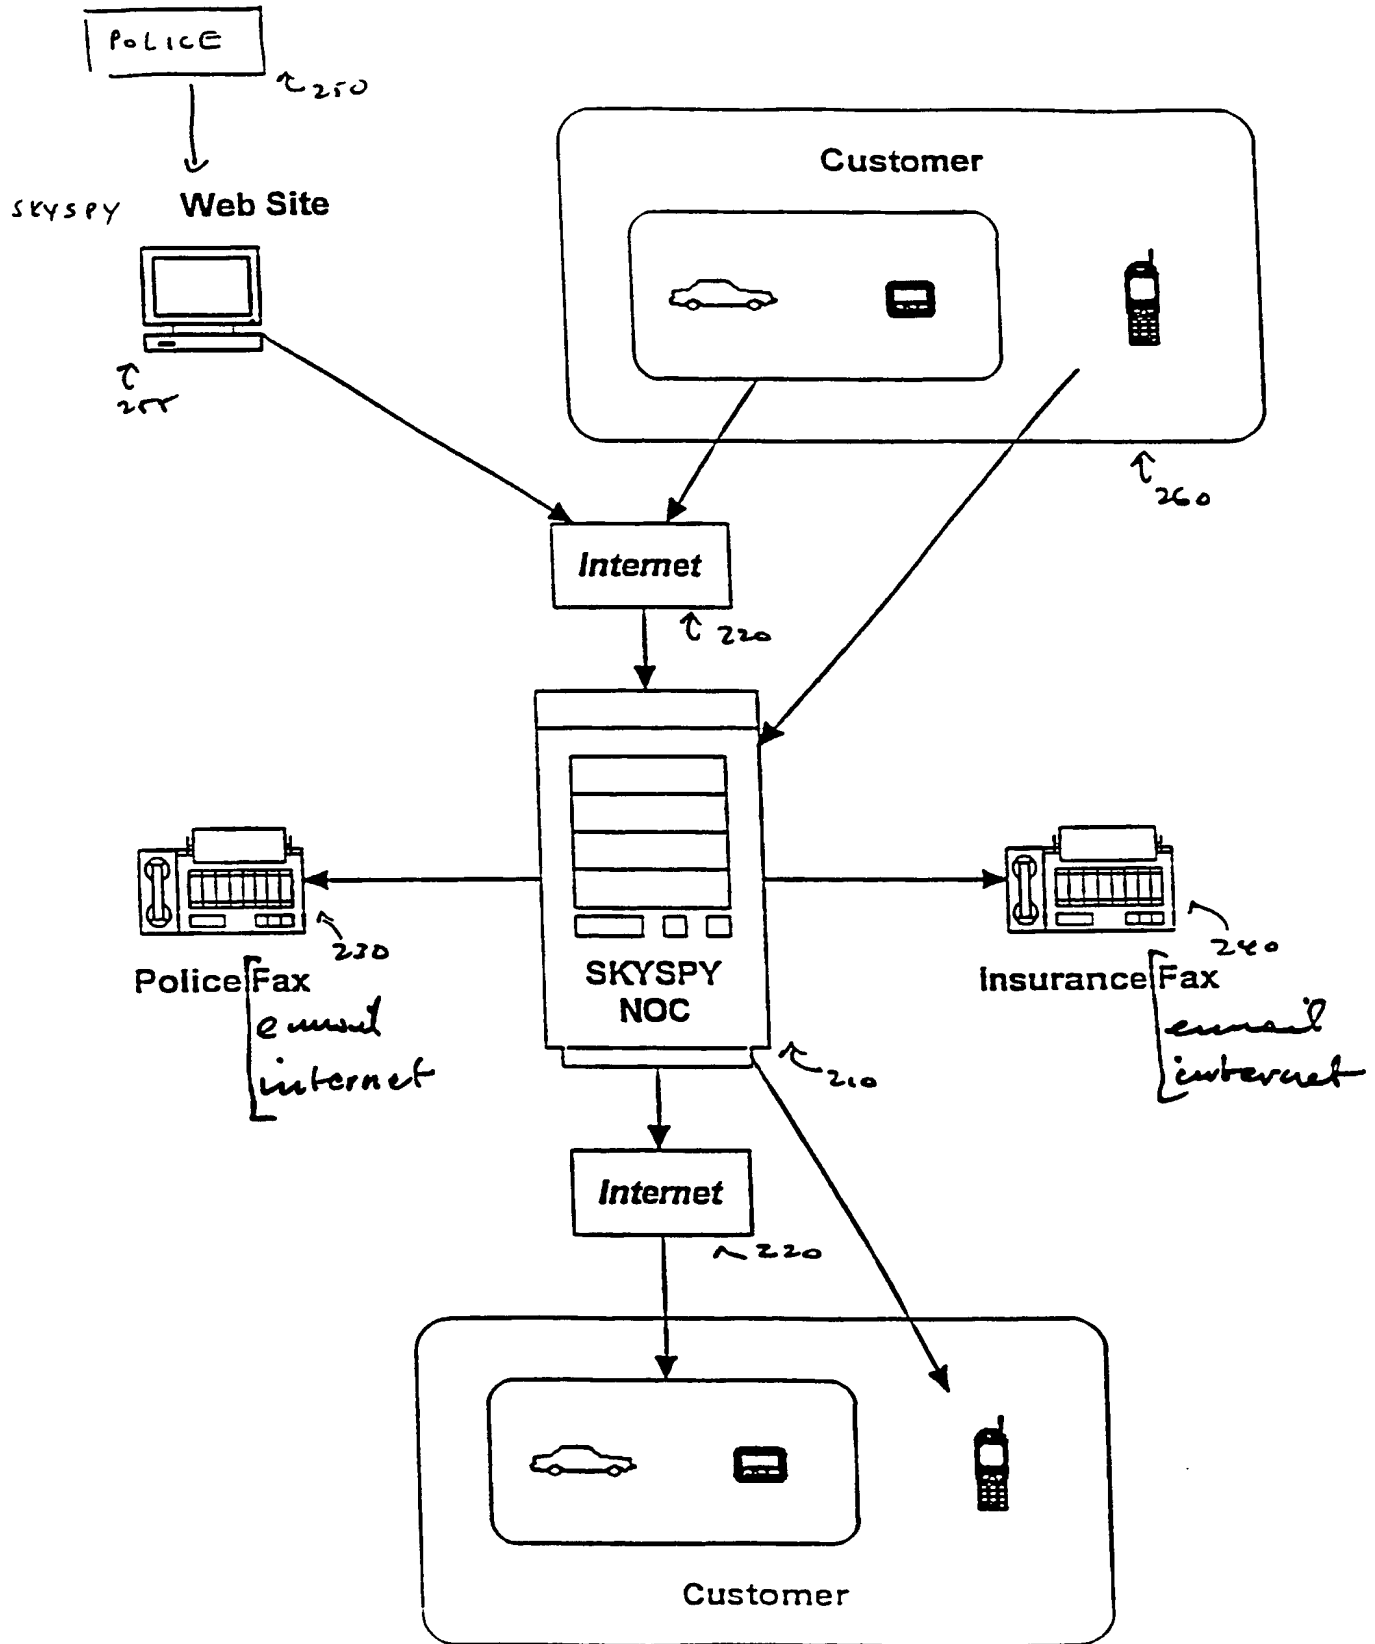


Fig. 2

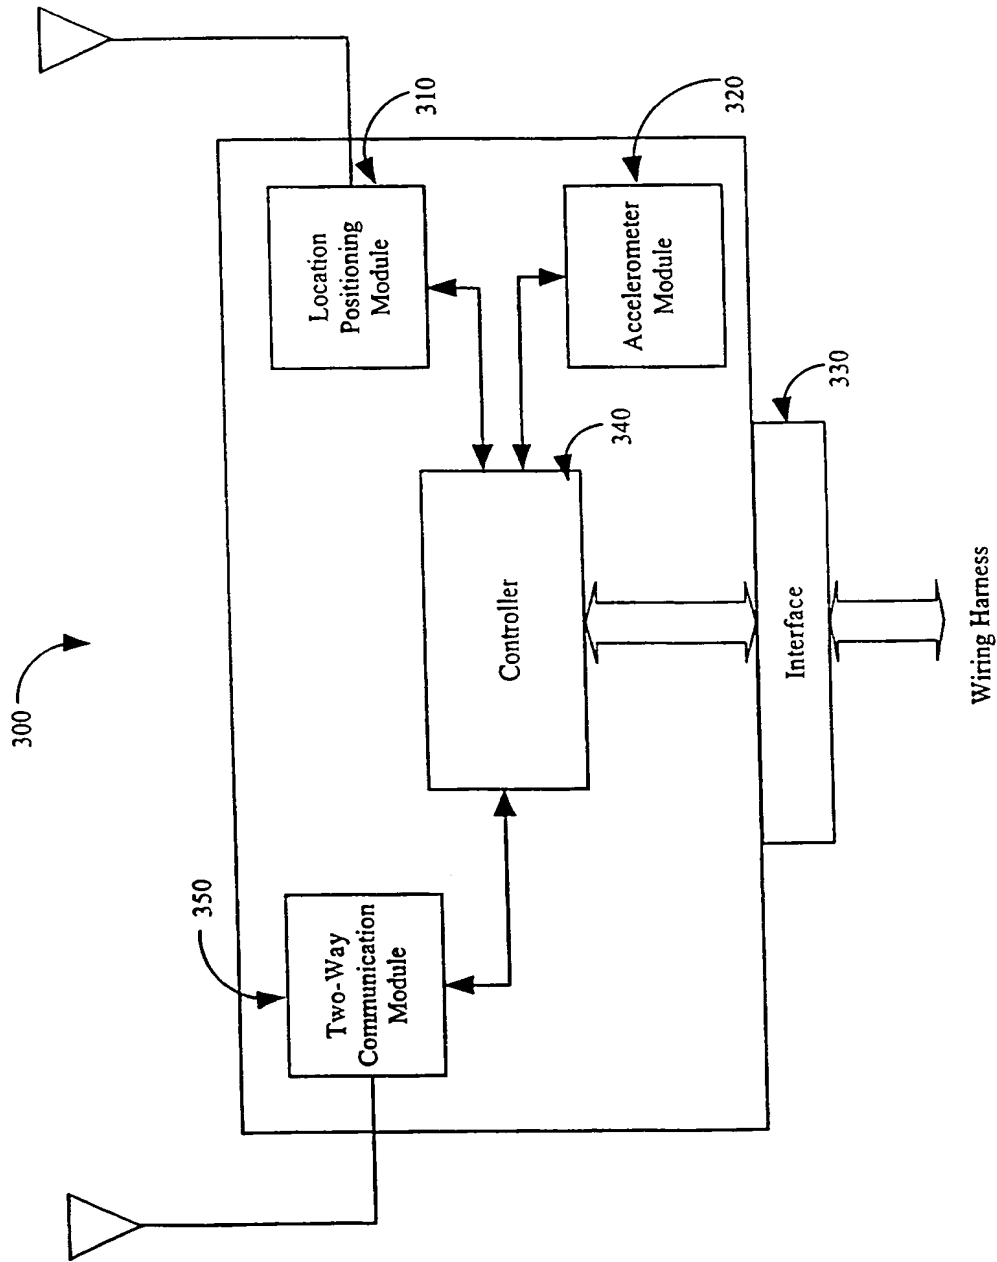


Figure 3

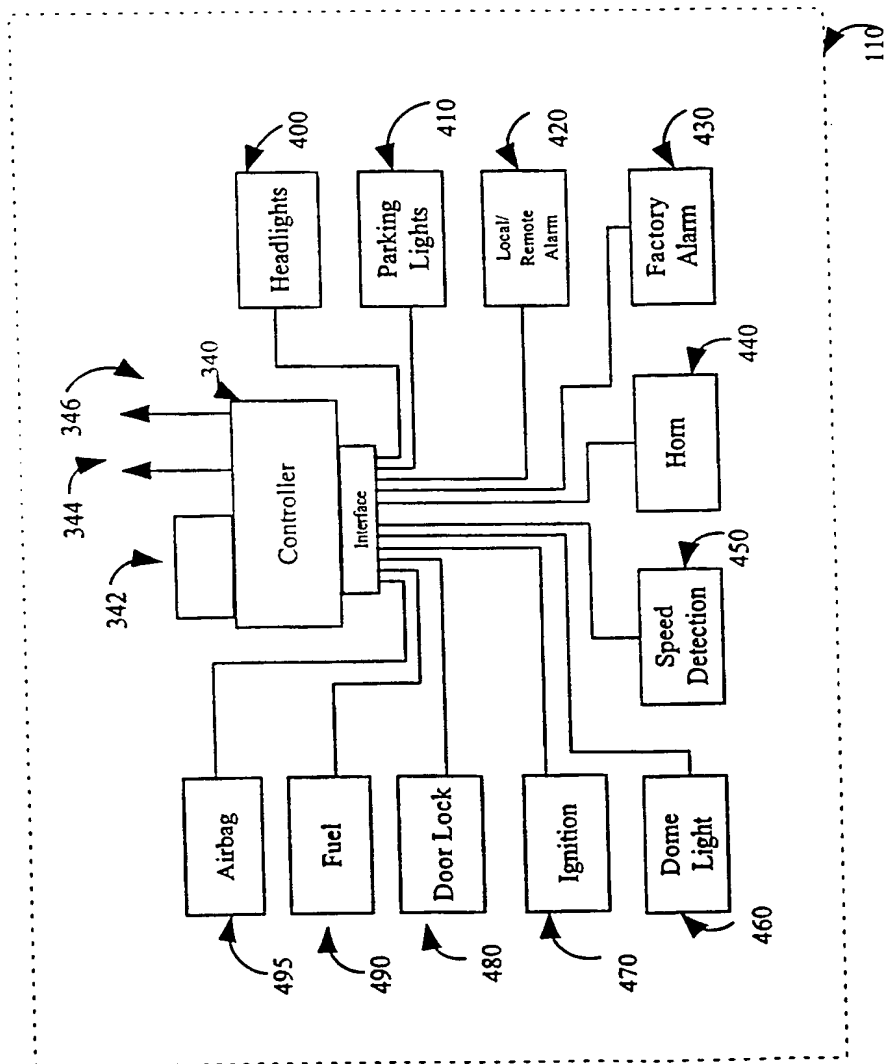


Figure 4

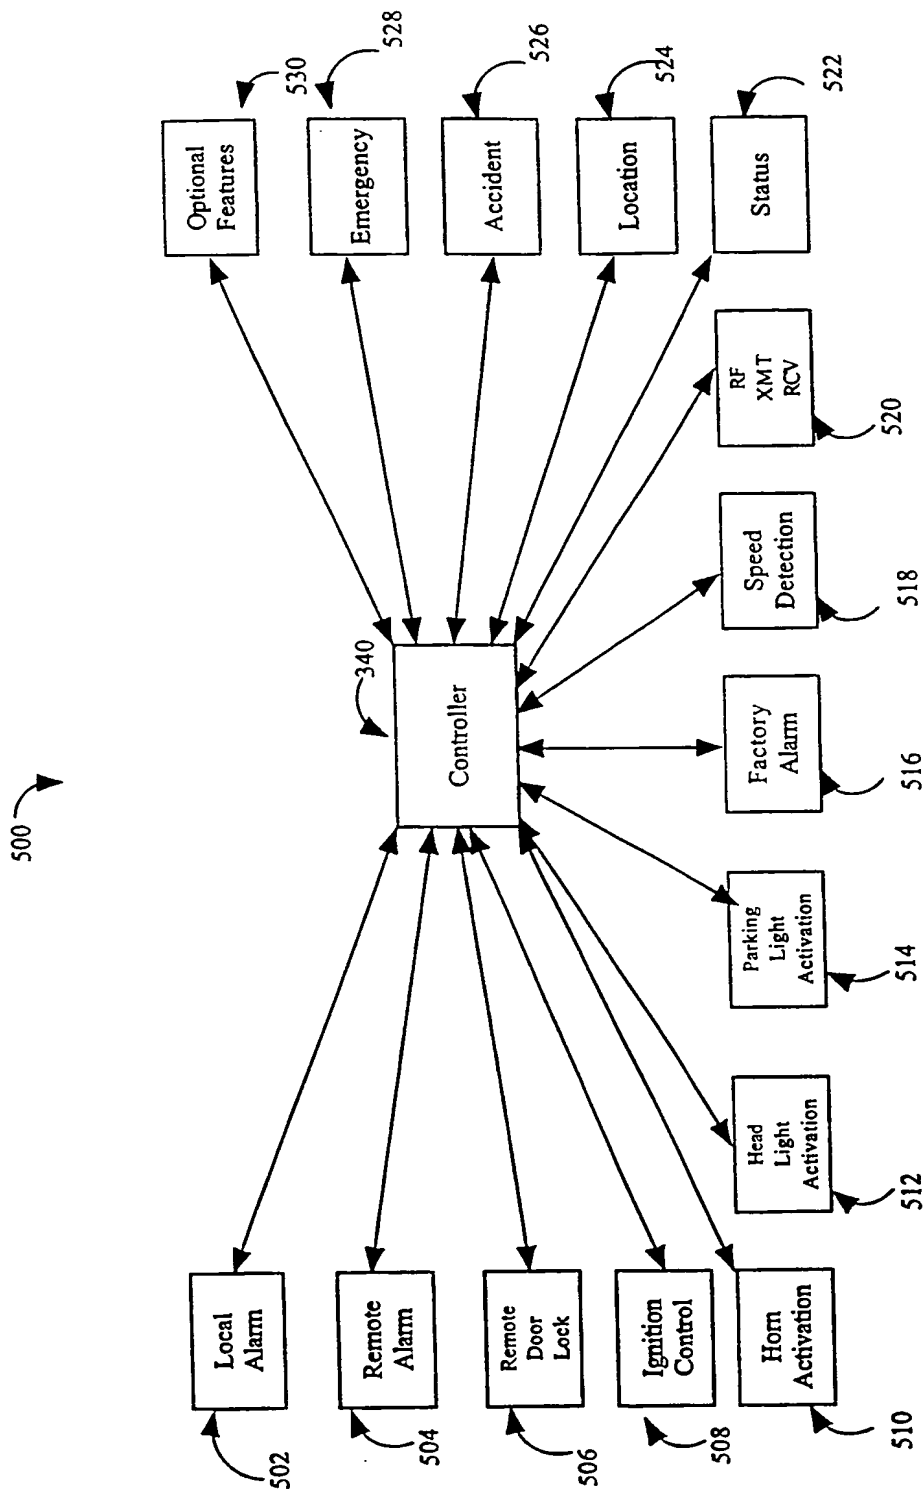


Figure 5

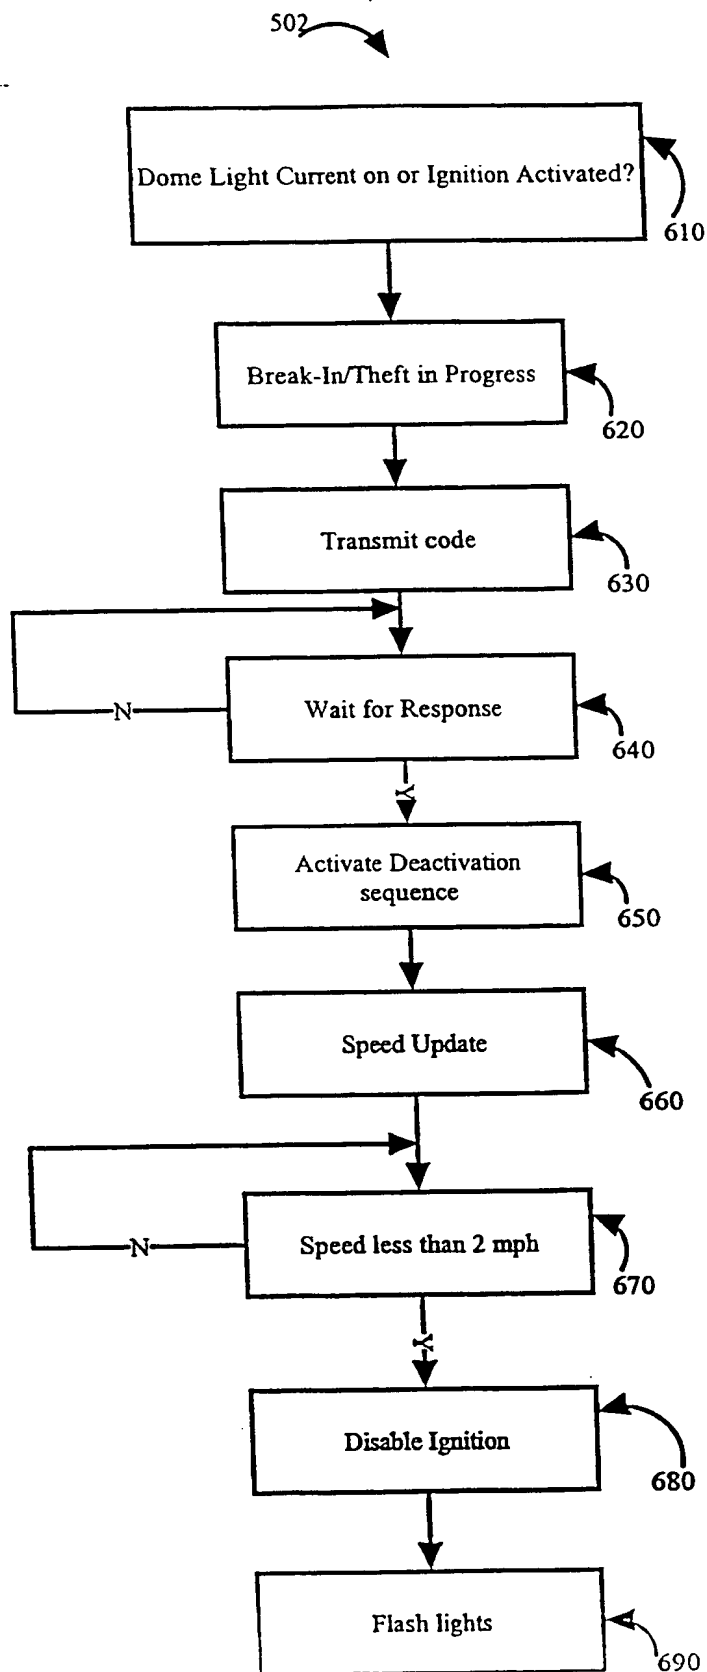


Fig. 6

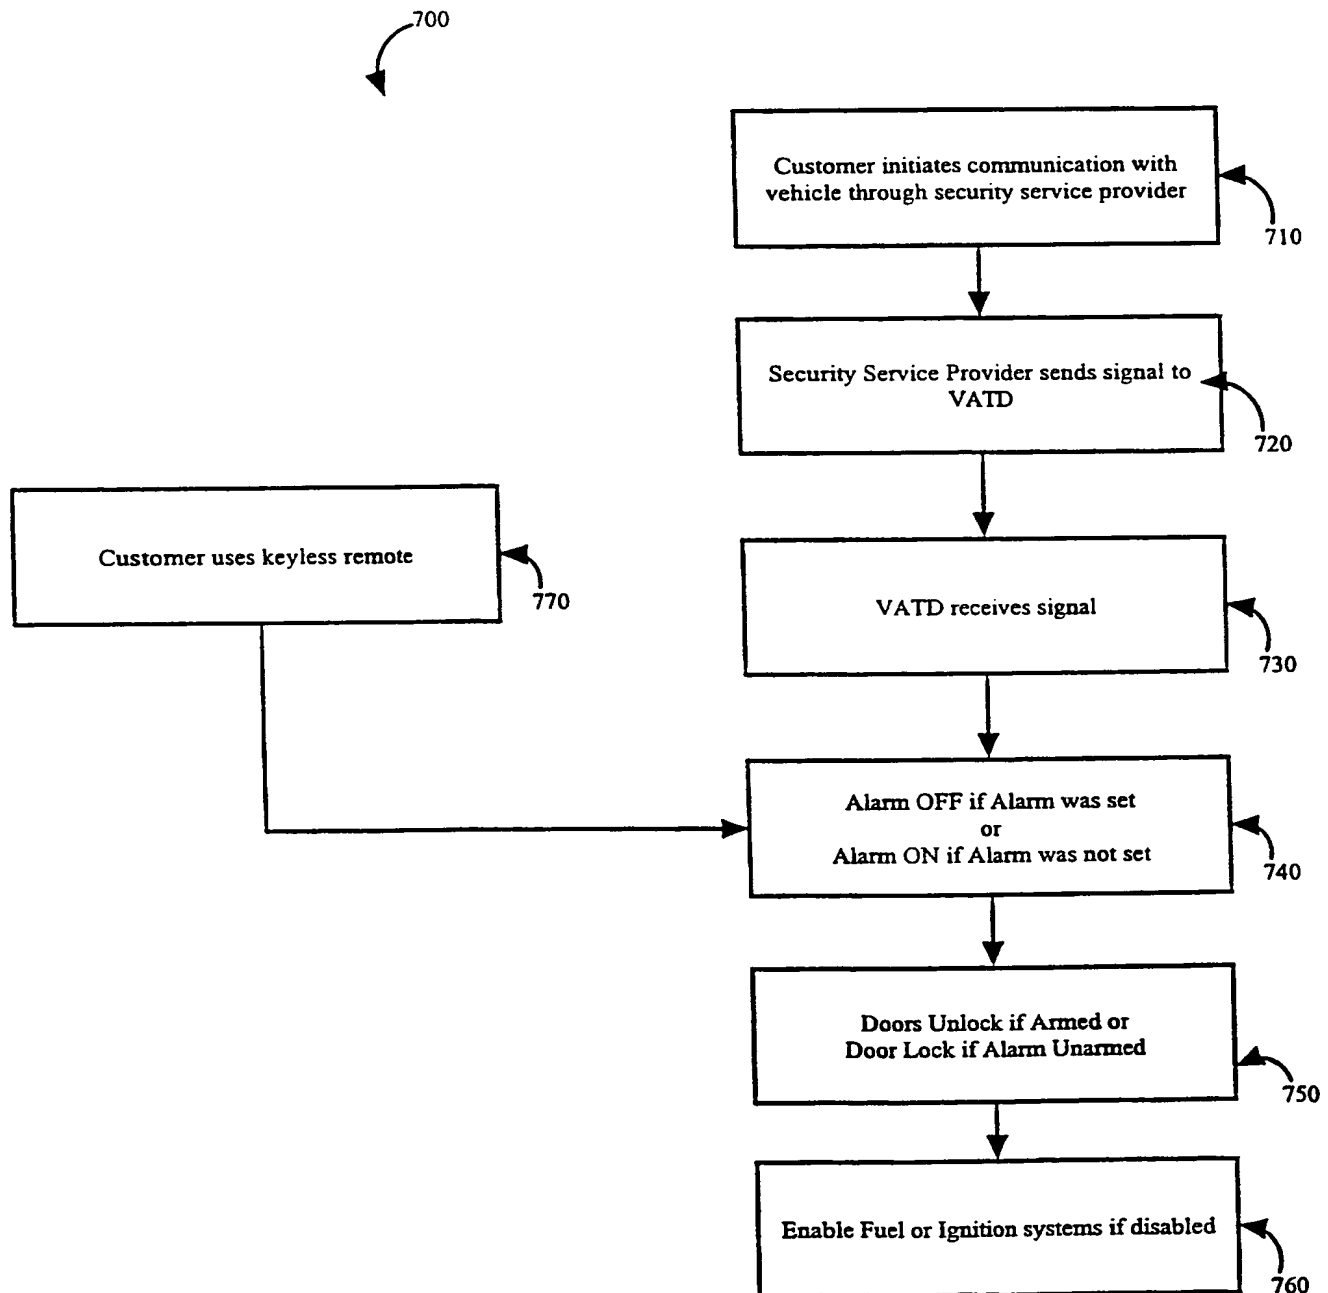


Figure 7

Output	Description	I / O	Parallel Bit							
			0	1	2	3	4	5	6	7
0	Lock Open	O	X						X	
1	Lock Close	O		X					X	
2	Ignition Disable	O			X				X	
3	Horn	O				X			X	
4	Head Lights	O					X		X	
5	Parking Lights	O						X	X	
6	Speed	I	X							X
7	Factory Alarm	I		X						X
8	Keyless Entry	I			X					X
9	Account Mode	I				X				X
10	Alarm Mode	I					X			X
11	Ignition Mode	I						X		X

Preliminary Bit Mode Table

Fig. 8

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US00/07964

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) :B60R 25/10

US CL :340/426

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 340/426, 430, 460, 539, 825.44; 307/10.2

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y,P	US 5,986,543 A (JOHNSON) 16 November 1999, Abstract	1-27
Y,P	US 5,990,785 A (SUDA) 23 November 1999, Abstract	6, 7, 10-12, 21, 23, 25-27
Y	US 5,574,427 A (CAVALLARO) 12 November 1996, Figure 1	17
Y	US 5,515,285 A (GARRETT SR et al) 07 May 1996, Figure 3	16
A	US 5,742,227 A (ESCARENO et al) 21 April 1998	1-27
A	US 5,835,868 A (MCELROY et al) 10 November 1998	1-27



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

16 JULY 2000

Date of mailing of the international search report

07 AUG 2000

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

JOHN TWEEL, Jr.

Telephone No. (703) 308-7826



## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US00/07964

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A,P	US 5,914,675 A (TOGNAZZINI) 22 June 1999	1-27
A,P	US 5,926,086 A (ESCARENO et al) 20 July 1999	1-27

Form PCT/ISA/210 (continuation of second sheet) (July 1998)\*

**This Page Blank (uspto)**